

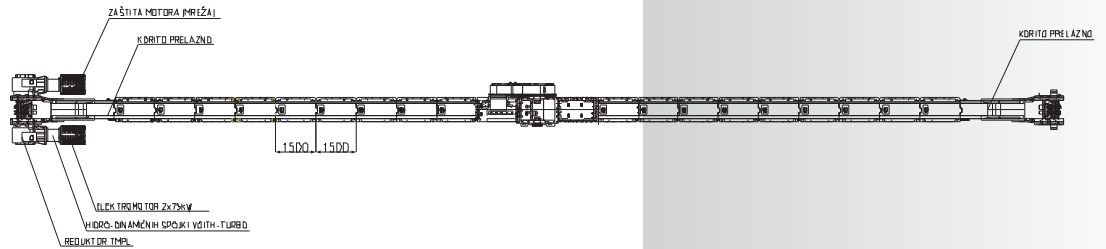


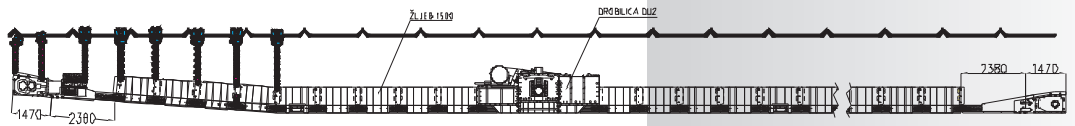

Odvozni grabuljasti transporter

PZF 05/P3/500

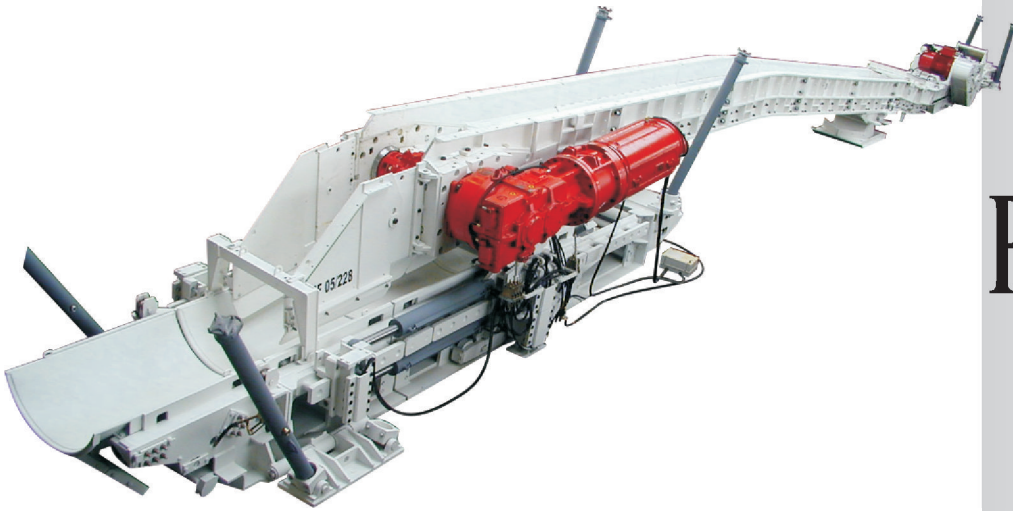

ODVOZNI GRABULJASTI TRANSPORTER PZF

Transportni kapacitet	max. 400	t/h
Brzina transportera	1,28	m/s
Material srednjeg lima (plecha)	Tipa HARDOX čelik otporan na habanje	-
Debljina srednjeg lima (plecha)	30	mm
Konstrukcija žljeba	(konstrukcija) kompletno zavarena	-
Duživa	1500	mm
Širina	500	mm
Vizina	190	mm
Dozvoljeno opterećenje na spoju žljeba	2000	kN
Lanac	2 x 26 x 92 mm po DIN	-
Interval lanca	130	mm
Grabulja	kovana	-
Reduktor	1 x TMPL	-
Elektromotor	2 x 75	kW
Dužina transportera	120	m
Trajnost	3	mil. tun
Težina	54,98 + drobilica	t