





Contactor

APK9U.Pxx



This high-voltage cabinet is made for explosive implementation and is intended for operation in deep coalmines (Classification IM2). The cabinet body provides protection level IP 54. The high-voltage cabinet is a welded, multi compartment steel structure with a quickly lockable shutter. This equipment is intended for switching on/off electric motor with tension 1440V/ 660 V - to a maximum of 9 motors. Strength contactors are divided to three separate circuits.

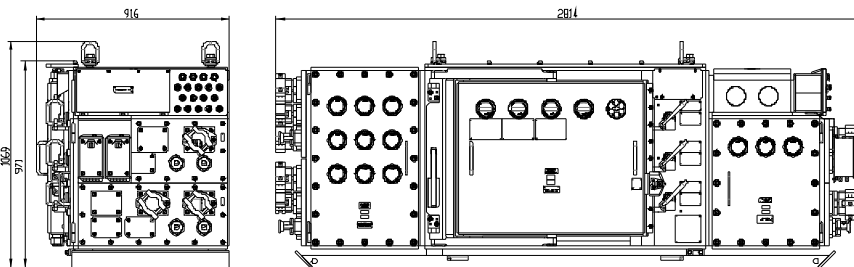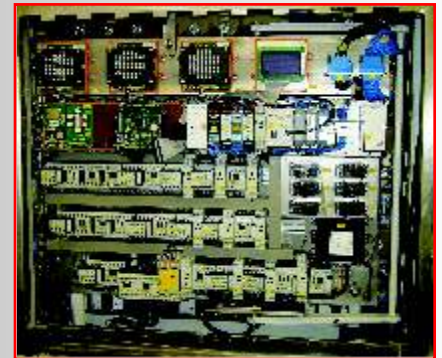

Voltage	3	1140/660	V	
Frequency		50	Hz	
Maximun currenty		1200		
Dielectric strength		25	k	
Number of contactors		9	ks	
Dimension (length, height, widht)	2814	976	916	mm
Rate of protection		IP 54		
Ambient temperature		10 - 40	°	
Weight		2800	kg	