





T Machinery a.s.

Frequency convertor MFK 400.SNO



The *Tension Converter MFK 400.SNO* is made of non explosive implementation and is intended for coalmines with classification I M2. The inner parts of the equipment comply with protection level IP 54. The *Tension converter MFK 400.SNO* serves for connecting traverse motor of combine.

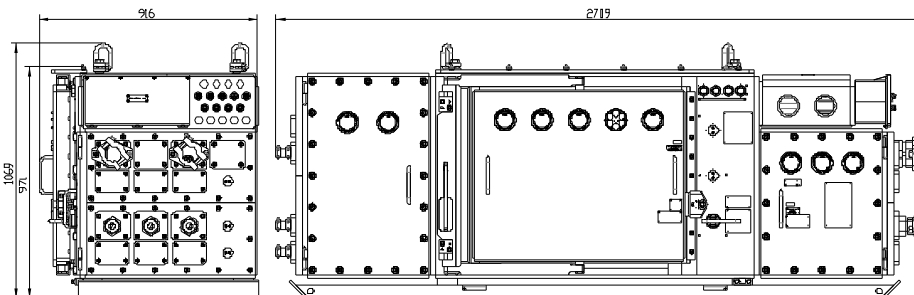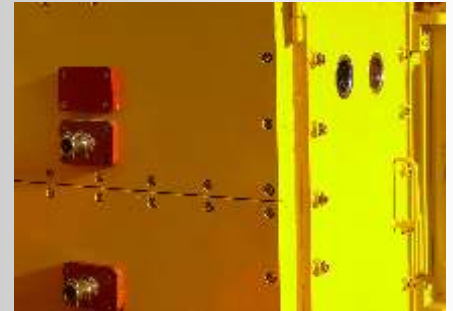

Input voltage	3	(660/500)	V	
Output voltage	3	(660/500)	V	
Input frequency	50		Hz	
Output frequency	5 - 120		Hz	
Output	2x65 (660B), 2x50(500B)		kW	
Input current	150			
Dimension (length, height, width)	2706	916	1069	mm
Rate of protection	IP 54			
Operating temperature of cooling medium	0 - 40		°	
Cooling system	water			
Weight	2400		kg	